

TS-R / TSE-R / TSU-R / TSEU-R

Specially made for stainless steel lifting



Application:

- For vertical lifting, transporting, and turning of stainless steel plates and structures
- Jaw openings available from: 0 to 2.16 in.
- Working load limit (WLL) 1,650 - 16,500 lbs
Min. WLL is 10% of max. WLL

Note: Surface hardness of the material lifted must not exceed 30 HRC/277 Hb

Features and Benefits:

- Pivot and cam are made of stainless steel
- Body and lock lever are nickel plated to prevent corrosion due to carbon contamination
- TSU-R / TSEU-R feature articulated lifting shackle for universal lifting flexibility at various angles
- TS-R / TSE-R feature standard lifting shackle
- Always equipped with a safety mechanism, ensuring the clamp does not slip when lifting force is applied and when load is being lowered
- Clamp is locked in closed as well as open position
- Lightweight design for easy handling
- Tough quality heavy-duty welded shell body
- Maintenance-friendly. Easy to exchange parts are available upon request

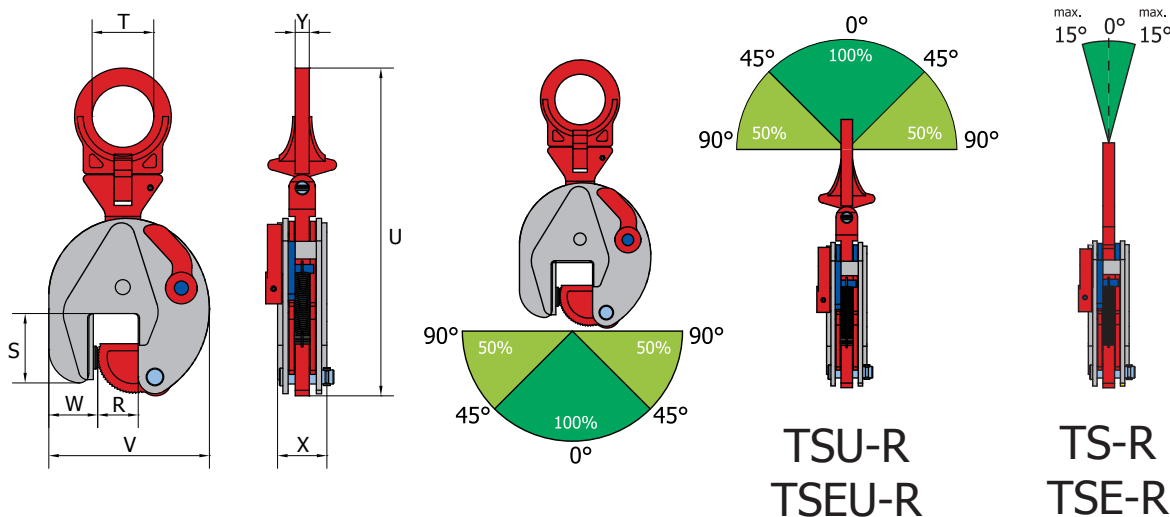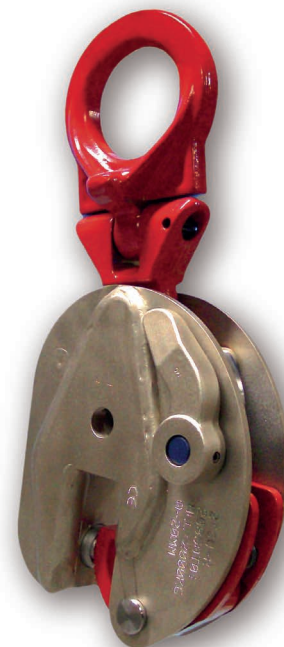

Reference No.	Type	Capacity/WLL (lb/pc)	Jaw opening (R) (inches)	Dimensions in inches							Weight (lb/pc)
				S	T	U	V	W	X	Y	
861075	0.75 TS-R	1,600	0 - 0.51	1.85	1.18	7.95	3.94	1.46	1.46	0.39	4
861100	1 TSE-R	2,200	0 - 1.00	2.20	1.77	10.35	5.55	1.46	1.85	0.59	8
861200	2 TSE-R	4,400	0 - 1.37	3.07	2.52	13.23	7.20	2.20	2.20	0.63	16
861300	3 TSE-R	6,600	0 - 1.37	3.07	2.52	13.23	7.20	2.20	2.20	0.63	16
861450	4.5 TSE-R	9,900	0 - 1.77	3.35	2.76	16.73	8.98	2.36	3.07	0.79	36
861600	6 TSE-R	13,200	0 - 2.00	4.49	2.95	19.29	10.20	3.23	3.07	0.79	47
861750	7.5 TSE-R	16,500	0 - 2.16	4.37	2.95	20.55	10.51	2.76	3.39	0.79	58
862075	0.75 TSU-R	1,650	0 - 0.51	1.85	1.18	7.99	3.94	1.46	1.46	0.39	4
862100	1 TSEU-R	2,200	0 - 1.00	2.20	1.97	11.50	5.55	1.46	1.85	0.59	9
862101	2 TSU-R	4,400	0 - 0.78	3.07	2.76	14.57	6.50	2.13	2.20	0.63	16
862200	2 TSEU-R	4,400	0 - 1.37	3.07	2.76	14.65	7.20	2.20	2.20	0.63	18
862300	3 TSEU-R	6,600	0 - 1.37	3.07	2.76	14.65	7.20	2.20	2.20	0.63	18
862450	4.5 TSEU-R	9,900	0 - 1.77	3.35	2.76	16.97	8.98	2.36	3.07	0.79	37
862600	6 TSEU-R	13,200	0 - 2.00	4.49	3.07	20.75	10.20	3.23	3.07	1.26	53
862750	7.5 TSEU-R	16,500	0 - 2.16	4.37	3.07	22.05	10.51	2.76	3.39	1.26	62